

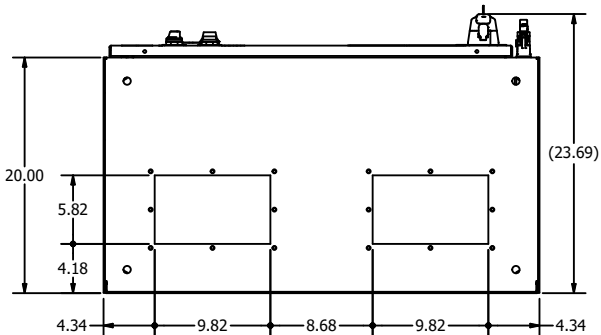




DIS:	DOOR MOUNTED KEYPAD
PB1:	START PUSHBUTTON
PB2:	STOP PUSHBUTTON
PB3:	RESET PUSHBUTTON
SW2:	LOCAL-OFF-REMOTE SEL. SWITCH
LT1:	RUNNING PILOT LIGHT

- 1 MINIMUM WIRE BENDING SPACE SHALL BE 15.00' FROM TOP OF CIRCUIT BREAKER POWER CONNECTION TO TOP OF ENCLOSURE.
- 2 ENSURE THAT ALL RIBBON CABLES ARE ROUTED AWAY FROM POWER CONDUCTORS
- 3 MINIMUM WIRE BENDING SPACE SHALL BE 15.00' FROM BOTTOM OF POWERSTACK POWER CONNECTION TO BOTTOM OF ENCLOSURE.
- 4 ENCLOSURE LAYOUT IS DESIGNED FOR CABLE ENTRY/EXIT TO BE TOP/BOTTOM.



14	APPROD: BDA 9/28/21	CHG BY: BDA 9/28/21	CHANGE: CHANGED	CIRCUIT BREAKER	AND PILOT DEVICES
13	E5178	APPROD: BDA 3/30/17	CHG BY: BDA 3/30/17	CHANGE: ADD	CHANGE: IN FRONT OF
12	E4105	APPROD: AES 2/25/13	CHG BY: BDA 2/25/13	CHANGE: CHANGED	CUSTOMER CONNECTION
11	E3930	APPROD: AES 11/12/12	CHG BY: BDA 11/12/12	CHANGE: CHANGED	DIAGRAM, & RELAY
10	E3796	APPROD: JAF 6/14/12	CHG BY: BDA 6/14/12	CHANGE: REVISED	PER
9	E3796	APPROD: JAF 6/14/12	CHG BY: BDA 6/14/12	CHANGE: REVISED	PER
8	E3796	APPROD: JAF 6/14/12	CHG BY: BDA 6/14/12	CHANGE: REVISED	PER
7	E3796	APPROD: JAF 6/14/12	CHG BY: BDA 6/14/12	CHANGE: REVISED	PER
6	E3796	APPROD: JAF 6/14/12	CHG BY: BDA 6/14/12	CHANGE: REVISED	PER
5	E3796	APPROD: JAF 6/14/12	CHG BY: BDA 6/14/12	CHANGE: REVISED	PER
4	E3796	APPROD: JAF 6/14/12	CHG BY: BDA 6/14/12	CHANGE: REVISED	PER
3	E3796	APPROD: JAF 6/14/12	CHG BY: BDA 6/14/12	CHANGE: REVISED	PER
2	E3796	APPROD: JAF 6/14/12	CHG BY: BDA 6/14/12	CHANGE: REVISED	PER
1	E3796	APPROD: JAF 6/14/12	CHG BY: BDA 6/14/12	CHANGE: REVISED	PER

