10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 8 9 7 3 5 6 4 VFD-RSI-100-H2-4C

А

В

С

D

Ε

F

G

Н


J

Κ


М


Ν

Item	Voltage / Phase	Normal Duty Rating	Normal Duty Amps	Heavy Duty Rating
VFD-RSI-100-H2-4C	460V / 3φ	100HP / 75kW	142.0A	75HP / 55kW

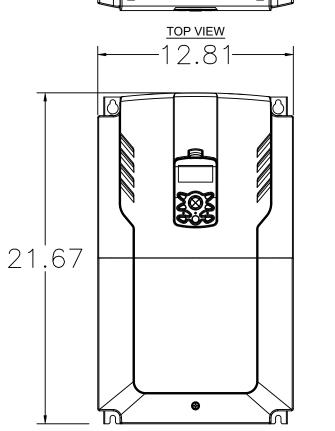


FRONT VIEW



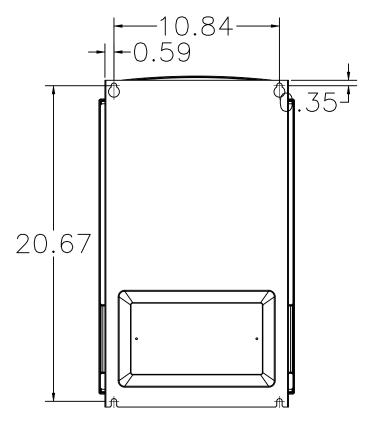

BACK VIEW

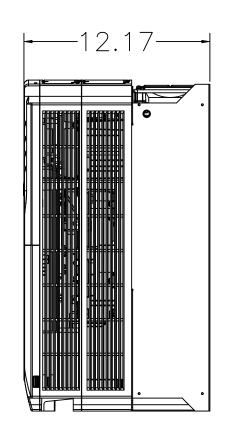

**RIGHT SIDE VIEW** 

NOTES:



Heavy Duty Amps	Weight	Heat Loss(W)	UL/IP RATING
106.0A	94.8lb / 43kg	2090	UL OPEN / IPOO

\* HD: Heavy duty type for constant torque load 150%P\* ND: Normal duty type for variable torque load 120%P\* Heatloss is measured with 60Hz, 100% load and default carrier frequency.
\* Refer to product manual for additional details and specifications
\* UL Type 1 is achieved with optional conduit box. P/N EN-101040-04

	SIGNATURES DATE DRWN. RJF 04/01/20	BENSHA	615 ALPHA DRIVE PITTSBURGH, PA. 15	38
H2 SERIES VFD P, 480V, 142A, ND	СНКЛ. DRP 11/17/20 ENG. DRP 01-10-22 MFG.		550 BRIGHT STREET LISTOWEL ONTARIO N4W 3W3	
P, 480V, 106A, HD JL OPEN (IP20)	DWG NO.	VFD-RSI-100-H2-4	4C	rev O
	SCALE: 1:1		SHEET 1 OF	1